



Product Catalog



1201-02-03 GIDC Halol, Panchmahal, Gujarat - 389350, India
Ph: +91 98103 35485 Email: sales@innovativetyres.co.in

OUR COMPANY

Innovative Tyres and Tubes Limited (ITTL) is part of the reputed TOT Group, one of the leading manufacturers and exporters of bias tyres in India, with a prodigious history and colossal experience of 20 years in manufacturing field. ITTL offers a wide range of products in the Truck / Bus, Agricultural & OTR and Motorcycle / 3-wheeler segments. The company has two separate manufacturing units- one for tyre and one for tube which are located across the road from each other.

Our full range of products, along with tubes and flaps, allows us to serve our customers with unparalleled flexibility of product mix and delivery. We call it the 2.5-to-350 range, referring to the disparity between the lightest motorcycle tyre and the heaviest off-the-road mining tyre that we produce under one roof.

The company has a strong hold over domestic and export market, manufacturing in various brands as well as performing job work for others, including prestigious names in the Indian tyre industry. We currently ship tyres to more than 40 countries spread across 5 continents.

Quality at Innovative is not an act, but a habit. Our manufacturing facility maintains the highest standards of quality and strict in-process controls so that our customers are assured of a superior quality product. Our research and development center includes compound testing, testing of chemical and physical properties and product performance testing such as plunger tests and pulley-wheel testing.

Our manufacturing plants is located in Halol in the industrial friendly state of Gujarat. Our location on the upcoming Delhi-Mumbai Industrial Corridor ensures that we are at the heart of a strong industrial belt with reliable infrastructure and access to all key market areas.




ITR-222
ITR-222

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
6.50-14	Light Truck	8	182	705	10.5	840	795	60	425	60	425
6.50-15	Light Truck	10	175	725	11.5	970	920	73	500	73	500
7.00-15	Light Truck	12	205	760	11.5	1175	1030	90	620	90	620
7.50-15	Light Truck	14	215	780	13	1450	1375	94	650	94	650
7.00-16	Light Truck	14	200	796	12.5	1315	1160	100	690	100	690
7.50-16	Light Truck	16	222	830	12.5	1580	1390	110	760	110	760
8.25-16	Light Truck	16	235	860	14	1845	1755	110	760	110	760
8.25-20	Truck/Bus	16	232	970	14	2300	2000	120	825	110	760
9.00-20	Truck/Bus	16	262	1035	14	2650	2360	115	795	105	725
10.00-20	Truck/Bus	18	280	1065	15.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	18	300	1090	15	3355	2945	120	825	110	760


MARSHAL XXX
MARSHAL XXX

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck/Bus	18	285	1080	18.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	18	300	1090	17	3355	2945	120	825	110	760



ITR-555

ITR-555

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck/Bus	18	285	1080	18	3080	2700	120	825	110	760



SIGMA XXX

SIGMA XXX

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck/Bus	18	285	1080	23.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	18	300	1090	21.5	3355	2945	120	825	110	760





ITL-444

ITL-444

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
65.0-14	Light Tuck	10	182	705	-	840	795	60	425	60	425
7.00-15	Light Truck	12	205	770	17	1175	1030	90	620	90	620
7.50-15	Light Truck	14	220	800	15	1450	1375	94	650	94	650
7.00-16	Light Truck	14	205	807	18	1315	1160	100	690	100	690
7.50-16	Light Truck	16	220	860	17.4	1580	1390	110	760	110	760
8.25-16	Light Truck	16	230	835	17.6	1845	1755	110	760	110	760
10.00-20	Truck/Bus	18	280	1065	21.5	3080	2700	120	825	110	760
11.00-20	Truck/Bus	18	292	1110	21.5	3355	2945	120	825	110	760
12.00-20	Truck/Bus	18	314	1140	21.5	3725	3265	115	795	105	725



SPRINTER

SPRINTER

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.00-15	Light Truck	12	205	770	16	1175	1030	90	620	90	620
7.50-15	Light Truck	14	220	805	15.5	1450	1375	94	650	94	650
7.00-16	Light Truck	14	205	800	16.5	1315	1160	100	690	100	690
7.50-16	Light Truck	16	220	835	17.5	1580	1390	110	760	110	760
8.25-16	Light Truck	16	230	860	17.5	1845	1755	110	760	110	760
8.25-20	Truck/Bus	16	232	970	19.5	2300	2000	120	825	110	760
9.00-20	Truck/Bus	16	262	1055	20.5	2650	2325	115	795	105	725
10.00-20	Truck/Bus	18	280	1075	24.5	3080	2700	120	825	110	760


N 426
N 426

						Maximum Load		Cold Inflation Pressure			
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
10.00-20	Truck/Bus	18	280	1070	22	3080	2700	120	825	110	760


ITL-999
ITL-999

						Maximum Load		Cold Inflation Pressure			
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
12.00-24	Truck/Bus	20	315	1230	20	4500	3875	125	860	110	760





ITS-888

ITS-888

						Maximum Load		Cold Inflation Pressure			
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	16	220	835	16	1580	1390	110	760	110	760
12.00-24	Truck/Bus	20	315	1235	20	4500	3875	125	860	115	795



ITS-777

ITS-777

						Maximum Load		Cold Inflation Pressure			
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	16	213	827	17	1580	1390	110	760	110	760
10.00-20	Truck/Bus	18	278	1078	19.5	3080	2700	120	825	110	760



S 78

S 78

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load		Cold Inflation Pressure			
						Single	Dual	Single		Dual	
						(Kgs.)	(Kgs.)	(PSI)	(Kpa)	(PSI)	(Kpa)
7.50-16	Light Truck	16	218	835	12.5	1580	1390	110	760	110	760



POWER MINER

POWER MINER

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load	Cold Inflation Pressure	
						(Kgs.)	(PSI)	(Kpa)
9.00-20	Mining (Truck)	16	265	1065	22.5	2500	101	700
10.00-20	Mining (Truck)	18	275	1075	22.5	2800	110	760
11.00-20	Mining (Truck)	18	292	1117	22.5	3000	110	760





SURYA

SURYA

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
8.3-24	Farm	6	211	995	26	810	34	230
9.5-24	Farm	8	230	1055	26	1120	41	280
11.2-24	Farm	8	232	1056	27	1550	36	248
12.4-24	Farm	12	335	1155	28	1820	50	350
13.6-24	Farm	12	345	1209	36	1900	42	209
14.9-24	Farm	12	375	1265	26	2000	38	260
16.9-28	Farm	12	430	1420	31	2240	30	207
16.9-30	Farm	14	450	1495	38	3150	52	360
18.4-30	Farm	14	470	1565	38	3450	37	260
23.1-30	Farm	14	590	1710	43	4250	29	200
16.9-34	Farm	12	429	1585	29	2500	32	220
18.4-34	Farm	14	462	1635	28	3750	38	260
11.2-38	Farm	12	285	1250	29	1285	26	180
13.6-38	Farm	12	345	1565	37	2430	44	300
15.5-38	Farm	8	385	1620	38	2060	26	180
18.4-38	Farm	14	470	1762	37	3837	36	248
20.8-38	Farm	14	532	1852	36	4500	35	241


SURYA +
SURYA +

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
12.4-28	Farm	12	322	1280	38	1650	36	250
13.6-28	Farm	12	345	1310	36	1800	33	230
14.9-28	Farm	12	378	1365	36	2120	33	230
18.4-30	Farm	14	470	1565	38	3450	37	260


SURYA GOLD
SURYA GOLD

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
12.4-28	Farm	12	322	1280	38	1650	36	250
13.6-28	Farm	12	345	1310	36	1800	33	230
14.9-28	Farm	12	378	1365	36	2120	33	230
16.9-30	Farm	14	450	1495	38	3150	52	360



SURYA ND

SURYA ND

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
11.2-24	Farm	8	284	1090	25	1250	35	240
14.9-24	Farm	8	375	1245	26	1800	26	180
11.2-38	Farm	8	284	1445	26	1500	33	230



ITF KESARI

ITF KESARI

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
6.00-16	Tractor Front	10	170	740	20	710	75	520
6.50-16	Tractor Front	8	175	760	13	750	48	330
7.50-16	Tractor Front	10	207	815	17	775	56	385


ITF 701
ITF 701

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
6.00-16	Tractor Front	8	180	756	17	675	65	450


ITF MAHAVEER
ITF MAHAVEER

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
6.00-16	Tractor Front	12	170	740	20	710	75	520



ITF 710

ITF 710

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
6.00-16	Implement	8	165	735	16	615	68	470
7.50-16	Implement	8	207	810	17	775	56	385
9.00-16	Implement	10	265	880	28	1215	55	380
10.00-16	Implement	10	275	890	28	1215	55	380
11.0-16	Implement	10	310	970	28	1360	51	350



ITF 711

ITF 711


						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
9.5L-14	Implement	8	235	1280	8	1090	44	300
11L-14	Implement	8	256	1365	8	1120	36	250
9.5L-15	Implement	10	240	1310	10	1285	54	370
11L-15	Implement	10	270	1365	10	1320	44	300


ITF 712
ITF 712

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
10/80-12	Implement	10	264	700	11	1450	56	390
10.0/75-15.3	Implement	12	264	760	11	1700	68	470
11.5/80-15.3	Implement	12	290	845	11	2180	59	410
12.5/80-15.3	Implement	14	310	885	11	2650	62	430
10.5/65-16	Implement	14	274	755	8	1900	77	530
10.5/80-18	Implement	14	275	885	8	2360	74	510
12.5/80-18	Implement	12	308	965	8	2650	54	370


ITF 713
ITF 713

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
400/60-15.5	Implement	14	400	875	20	2900	52	360

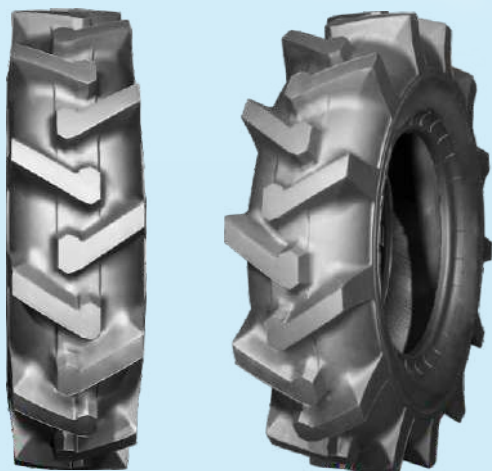

SURYA ST

SURYA ST

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
4.00-8	Farm	6	114	411	16	1250	40	275
6.00-12	Farm	8	155	633	17	1800	58	400
7.00-12	Farm	8	200	667	16	1500	52	360



ITF 412

ITF 412

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
9.00-16	Tractor Trailer	18	253	912	18	2360	110	760


ITF 418
ITF 418

						Maximum Load	Cold Inflation Pressure	
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Single	Single	
						(Kgs)	(PSI)	(Kpa)
9.00-16	Tractor Trailer	18	253	912	18	2360	110	760





SKID PRO

SKID PRO

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	265	800	14	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	325	850	35	2265	80	5.5	2865	80	5.5



SKID BOSS

SKID BOSS

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	267	795	28	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	367	845	28	2265	80	5.5	2865	80	5.5





SKID MASTER

SKID MASTER

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
10-16.5	Loader	12	259	798	35	2185	75	5.2	2765	75	5.2
12-16.5	Loader	12	325	850	35	2260	80	5.5	2865	80	5.5



MP TUFF

MP TUFF

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
12.5/80-18	Loader	14	310	990	26	3150	71	4.9	2180	71	4.9



ROCKSTER

ROCKSTER

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
16.9-28	Industrial	12	275	1460	33	2722	110	2.4



ROCK MASTER

ROCKMASTER

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
16.9-24	Industrial	12	440	1310	27	2900	32	2.2
19.5L-24	Industrial	16	490	1325	30	4125	42	2.9
18.4-26	Industrial	12	472	1425	28	4375	42	2.9
16.9-28	Industrial	12	440	1410	28	3450	38	2.6





GRIPSTER HD

GPRISTER HD

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
13.00-24	Industrial	16	350	1295	21	3350	58	4
14.00-24	Industrial	16	380	1350	27	3650	54	3.7
16.9-24	Industrial	16	590	1320	27	3900	38	2.6
17.5-25	Industrial	16	596	1320	26	3350	40	2.75
20.5-25	Industrial	16	500	1485	31.5	8820	33	2.2
23.5-25	Industrial	16	595	1610	32	10475	39	2.0



ROAD KING

ROADKING

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
23.1-26	Industrial	16	595	1575	28	9645	33	2.28



LIFT TRAX

LIFT TRAX

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
5.00-8	Fork Lift	8	143	476	11	1090	145	10	1420	145	10
6.009	Fork Lift	10	173	551	13	1332	123	8.5	1730	123	8.5
6.50-10	Fork Lift	12	180	590	14	2145	130	9	1650	130	9
7.00-12	Fork Lift	12	194	685	15.5	2060	123	8.5	2680	123	8.5
8.15-15	Fork Lift	14	200	725	16.5	3373	140	9.6	2595	140	9.6
8.25-15	Fork Lift	14	235	850	17	4225	116	8	3250	116	8



AIR BOSS

AIR BOSS

Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	at 15 kmph / 10 mph			at 10 kmph / 5 mph		
						Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
6.50-10	Fork Lift	12	185	590	11	2145	130	9	1650	130	9
7.00-12	Fork Lift	12	194	685	11	2060	123	8.5	2680	123	8.5




POWER MINER - E3
POWER MINER - E3

						Single			Dual		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
14.00-24	OTR	24	365	1345	25	5150	58	5.7	8500	83	5.7
14.00-25	OTR	24	375	1368	26	5150	58	5.7	8500	83	5.7
17.5-25	OTR	20	430	1370	30	5000	58	4.0	8250	83	5.7
20.5-25	OTR	20	530	1490	34	6000	47	3.2	9500	65	4.5
23.5-25	OTR	24	600	1625	36	8000	51	3.5	12500	70	4.8


MINING KING
MINING KING

						Single			Dual		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
14.00-25	OTR	20	374	1375	24	5150	58	4.7	8500	83	5.7
16.00-25	OTR	32	450	1495	28	7290	94	6.5	12485	127	8.7
17.5-25	OTR	20	455	1380	22	5000	58	4.0	8250	83	5.7
20.5-25	OTR	24	515	1530	27	6000	47	3.2	9500	65	4.5
23.5-25	OTR	24	610	1835	31	8000	51	3.5	12500	70	4.8
26.5-25	OTR	24	665	1765	30	9000	40	2.7	1400	55	3.8



POWER MAX

POWER MAX

						Single			Dual		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
12.00-20	OTR	20	319	153	22	4000	125	8.6	3450	115	7.9
12.00-24	OTR	20	320	1246	21.9	4500	125	8.6	3875	115	7.9



SAND RIDER

SAND RIDER

						Single			Dual		
Tyre Size	Application	Ply Rating	Section Width (mm)	Overall Dia. (mm)	Non Skid Depth (mm)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)	Maximum Load (Kgs)	Inflation Pressure (psi)	Inflation Pressure (bar)
9.00-15	OTR	6	254	845	10	975	75	5.2	975	75	5.2
9.00-16	OTR	8	245	880	10	975	75	5.2	975	75	5.2



Notes

This image shows a full page of a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

INNOVATIVE

TYRES & TUBES LTD

1201-02-03 GIDC Halol, Panchmahal, Gujarat - 389350, India

Ph: +91 98103 35485 Email: sales@innovativetyres.co.in